


Visible, demountable system with
increased corrosion protection

OWAtecta – metal ceilings


OWA

System S 33e | Visible, demountable

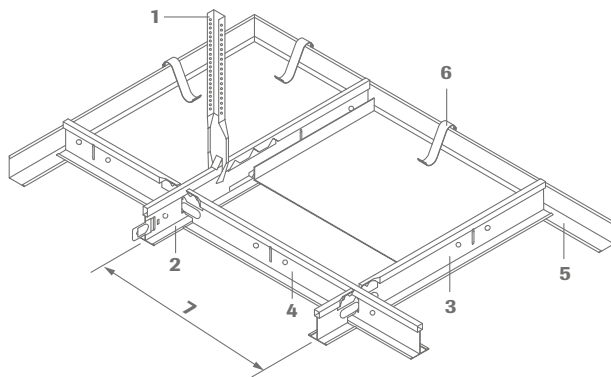


- 1 Hanger no. 17/45KB
- 2 Main tee no. 45KB
- 3 Cross tee no. 46KB
- 4 Cross tee no. 47KB
- 5 Wall angle no. 50KB
- 6 Wall clip no. 99009
- 7 Module distance

Section:

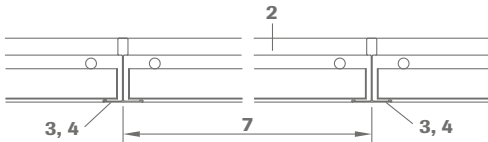


Cross-section:

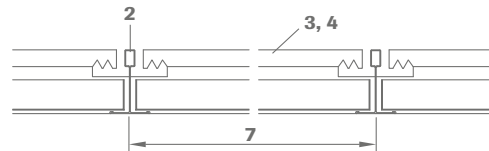


Section dimensions:

No. 45KB, no. 46KB
and no. 47KB



Installation:

The cross tees are provided with hanging flaps at both ends. Two cross tees must be inserted into a slit. Here, it should be ensured that the contoured flaps are attached aligned and not laterally reversed. The ends of the hanger profiles are provided with click connectors.




Technical data

Dimensions	625 x 625 mm
Material	Galvanised sheet steel, powder-coated on both sides
Colour	White (similar to RAL 9003)
Reaction to fire	OWAtecta tile: A2-s1,d0 in accordance with EN 13501-1 OWAconstruct structural elements: A1 in accordance with EN 13501-1
Edges	K 03
Thickness	Approx. 0.6 mm
Metal suspension	OWAconstruct support grid: all metal parts are protected against corrosion with 275 g zinc/m ² /side and given an additional 25 µm coating on both sides
Minimum suspension depth	75 – 100 mm (depending on the concrete present) 120 mm for the convenient removal of the tiles
Corrosion protection	OWAtecta tile: Class C in accordance with EN 13964 OWAconstruct sub-construction: Class D in accordance with EN 13964 for use in indoor swimming pools and wet rooms (for further information please contact our department: anfragen_consult@owa.de)

Perforations:




$\alpha_W = 0.05$ | NRC = 0.05



L0 un-perforated

Wall perimeter:




L wall angle **no. 50KB**,
steel, visible side white
+ wall clip no. 99009



Integrated lighting:

OWA can supply compatible light fixtures for this system.

For details of installation please see [OWA-brochure 9630 e](#) and [OWAtecta Installation Guide 9303 e](#).



Installation examples:



Caution:

For use in indoor swimming pools and wet rooms, additional measures must be observed. For further informations please contact our consulting department OWAconsult or please note [OWAtecta Installation Guide 9303 e](#). When installing suspended ceilings in rooms where class D corrosion protection is required all cut surfaces and edges must be treated with Zincor or conventional industrial alu-zinc-sprays, in order to prevent corrosion (also see section 4.3.1 of [OWAtecta Installation Guide 9303 e](#)).

Material requirements per m² (approximations):

module sizes in mm

No.	Description	625 x 625	625 x 625 *
17/45KB	Hanger	0.7 piece	1.1 piece
45KB	Main tee	0.8 m	1.6 m
46KB	Cross tee	0.8 m	1.6 m
47KB	Cross tee	1.6 m	–
99009	Wall clip	Depending on room size and shape	
50KB	Wall angle	Depending on room size and shape	

Weight per m²:

	625 x 625	625 x 625 *
Suspension system approx.	1.2 kg/m ²	1.22 kg/m ²
Cassettes approx.	Approx. 4.5 kg/m ²	

* Installation with reduced hanger profile distance (≤ 625 mm)

Blue Angel

These products meet the Ecolabel requirements for „Low-emission thermal insulation and ceiling products designed for use in buildings, RAL UZ 132“ (October 2010 edition).



VOC emissions OWAtecta metal ceiling tiles

Appropriate for use in indoor spaces in accordance with the AgBB and the „approval principles regarding health assessments of construction products in indoor spaces“.

In clinical and hygienic-sensitive areas:
surface un-perforated (L0)



Please refer to OWA-brochure no. 9398 e and [OWAtecta Installation Guide 9303 e](#) for recommendations regarding classification and versions.

System description:

visible, demountable OWAconstruct system S 33e (lay-in system)

Quality requirements:

OWAtecta lay-in tiles made of galvanised steel sheet, unperforated. White on both sides (similar to RAL 9003). Regarding material characteristics, size and colour accuracy, we follow our quality guidelines, which are on par with TAIM guidelines (Association of Industrial Metal Ceiling Manufacturers) as well as EN 13964.

Special features can be found in the [OWAtecta Installation Guide 9303 e](#).

Product warranties

The information provided in this leaflet is based on the standards and data available at the time of publication. Any performance, warranties or guarantees provided, expressed or implied, are subject to the exclusive use of OWA components and the installation of those components in accordance with our recommendations. Failure to adhere to these conditions will result in the invalidation of any performance claims, warranties or guarantees and rejection of any liability. OWA reserves the right to make any technical improvements to the products, systems or services without prior notice. **All goods and services are supplied in accordance with our current Terms and Conditions of Sale.** Errors excepted!



The information in this brochure is up-to-date at the time of publication. Subject to alterations. Please contact our OWAconsult team for specific advice. Our experts will be happy to answer your questions using the following contact details: tel: +49 9373 201-444 or e-mail: info@owaconsult.de

Odenwald Faserplattenwerk GmbH

Dr.-F.-A.-Freundt-Straße 3 | 63916 Amorbach | Germany
tel +49 9373 201-0 | info@owa.de
www.owa-ceilings.com